


Tapped-base Pillow Blocks

UCPA 200 (normal-duty)

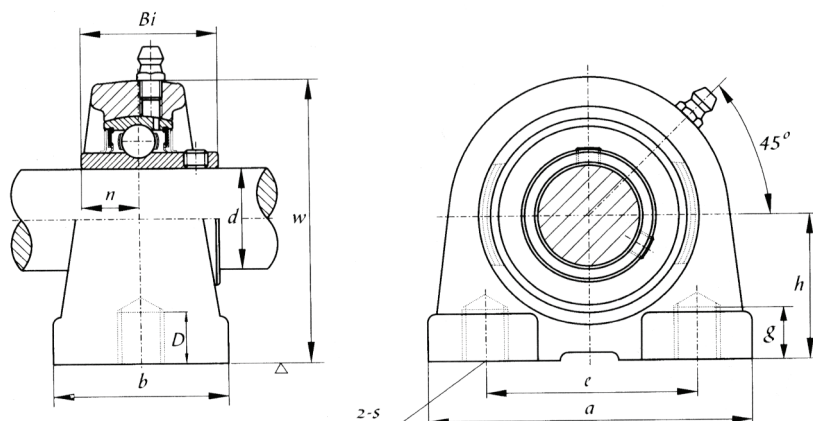

Bearing Unit No.	Shaft Dia. d		Dimensions (in.) or (mm)										Bolt size (mm)	Bearing No.	Housing No.	Weight (kg)
	(in.)	(mm)	h	a	e	b	s (mm)	g	w	D	Bi	n				
UCPA 201 201-8	1/2	12	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 31.0	0.5000 12.7	M 10	UC 201 201-8	PA 201	0.64
UCPA 202 202-10	5/8	15	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 31.0	0.5000 12.7	M 10	UC 202 202-10	PA 202	0.64
UCPA 203 203-11	11/16	17	1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 31.0	0.5000 12.7	M 10	UC 203 203-11	PA 203	0.64
UCPA 204-12 204	3/4 20		1 3/16 30.2	3 76	2 3/64 52	1 9/16 40	10	7/16 11	2 7/16 62	1/2 13	1.2205 31.0	0.5000 12.7	M 10	UC 204-12 204	PA 204	0.51
UCPA 205-14 205-15 205 205-16	7/8 15/16 1	25	1 7/16 36.5	3 5/16 84	2 13/64 56	1 25/32 45	10	15/32 12	2 27/32 72	1/2 13	1.3386 34.0	0.5630 14.3	M 10	UC 205-14 205-15 205 205-16	PA 205	0.70
UCPA 206-18 206 206-19	1 1/8 1 3/16	30	1 11/16 42.9	3 11/16 94	2 19/32 66	1 31/32 50	14	15/32 12	3 5/16 84	23/32 18	1.5000 38.1	0.6260 15.9	M 14	UC 206-18 206 206-19	PA 206	1.2
UCPA 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1 7/8 47.6	4 11/32 110	3 5/32 80	2 5/32 55	14	1/2 13	3 3/4 95	25/32 20	1.6890 42.9	0.6890 17.5	M 14	UC 207-20 207-21 207-22 207 207-23	PA 207	1.7
UCPA 208-24 208-25 208	1 1/2 1 9/16	40	1 15/16 49.2	4 9/16 116	3 5/16 84	2 9/32 58	14	1/2 13	3 3/4 100	25/32 20	1.9370 49.2	0.7480 19.0	M 14	UC 208-24 208-25 208	PA 208	2.0
UCPA 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4	45	2 9/64 54.2	4 23/32 120	3 35/64 90	2 3/8 60	14	1/2 13	4 1/4 100	1 25	1.9370 49.2	0.7480 19.0	M 14	UC 209-26 209-27 209-28 209	PA 209	2.2
UCPA 210-30 210-31 210 210-32	1 7/8 1 15/16 2	50	2 1/4 57.5	5 1/8 130	3 45/64 94	2 17/32 64	16	9/16 14	4 9/16 116	1 25	2.0315 51.6	0.7480 19.0	M 16	UC 210-30 210-31 210 210-32	PA 210	2.8